


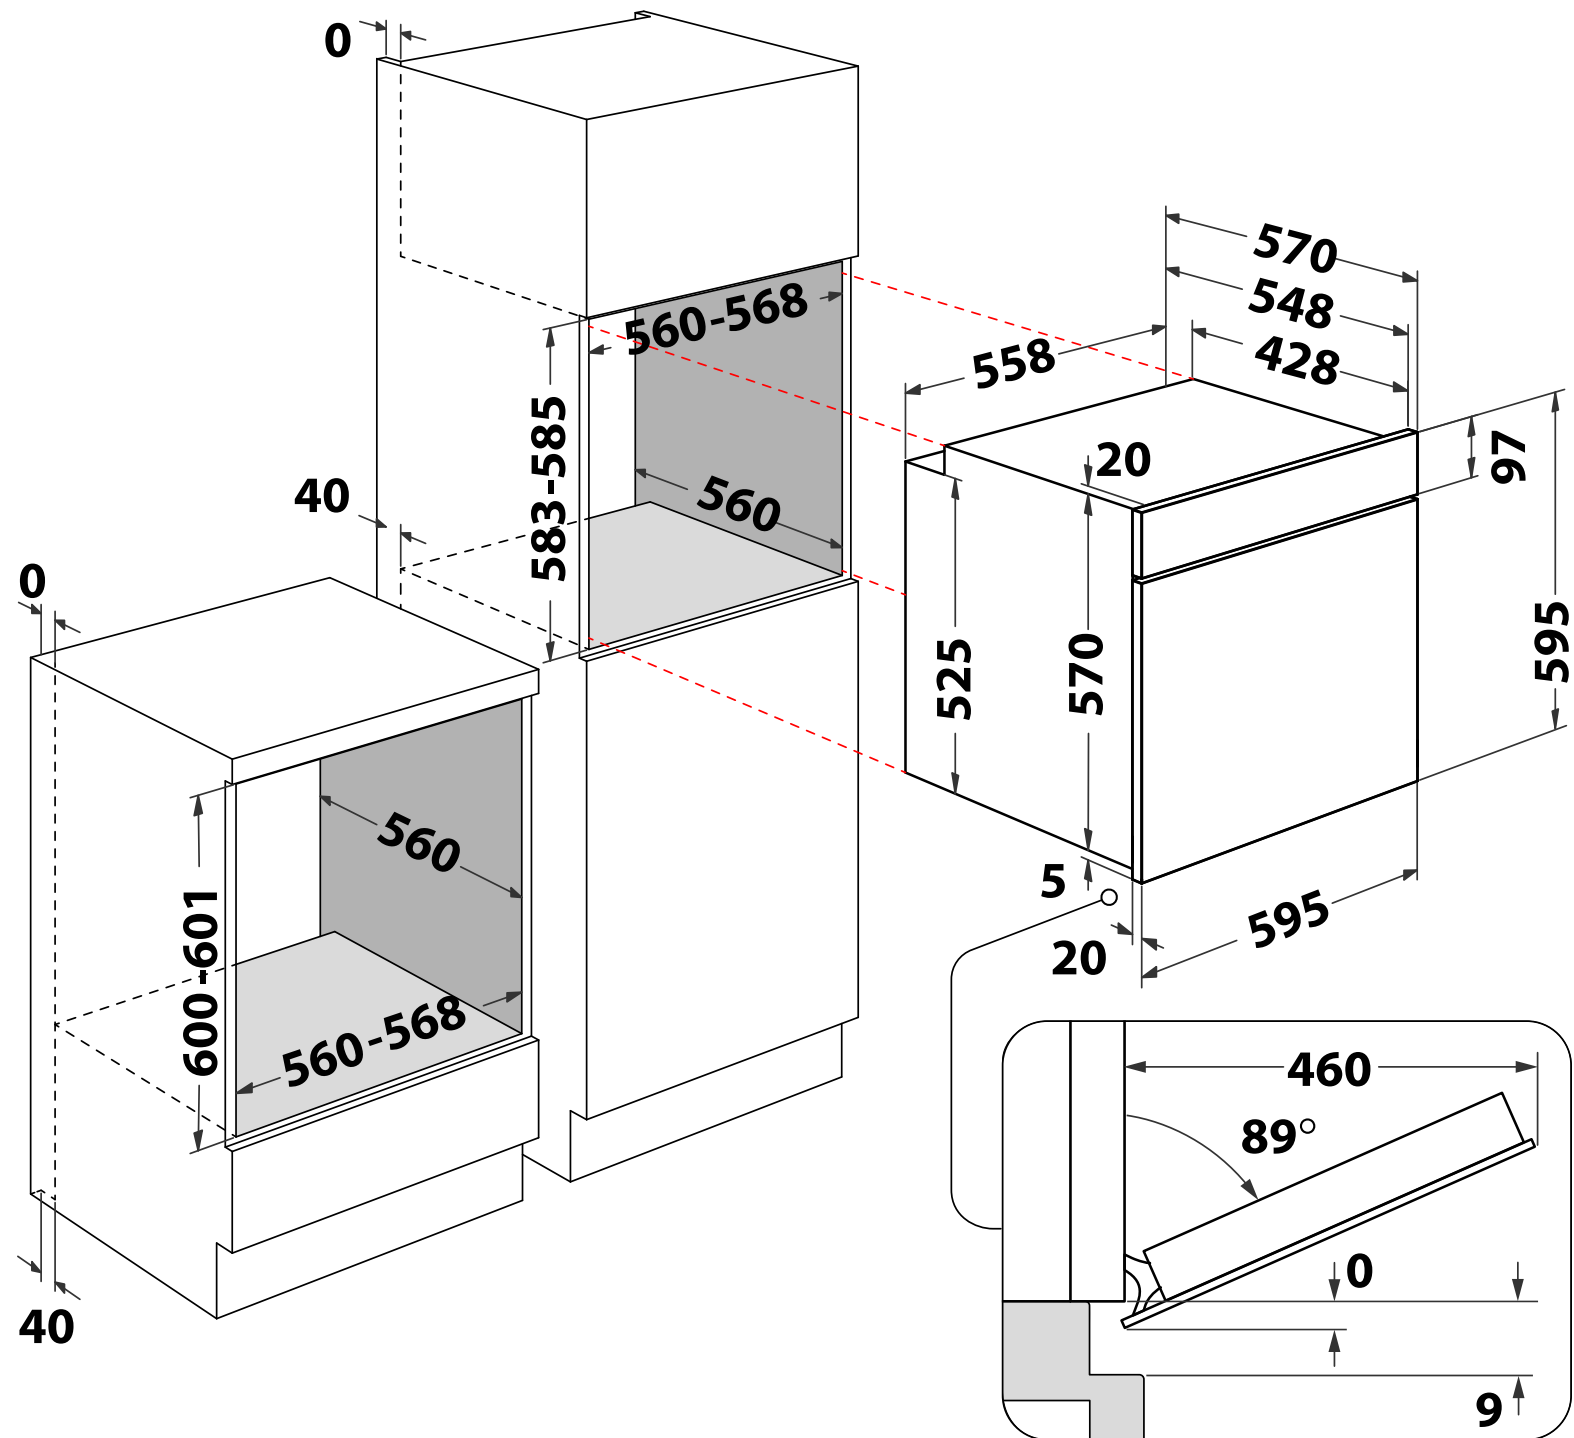

DIMENSION		MEASURE		DIMENSION		MEASURE	
OVERALL CABINET				APPLIANCE			
MIN Height of the wall cabinet niche, including all required space for installation or ventilation		0	mm	Height of the front		595	mm
MIN Height of the tall cabinet niche, including all required space for installation or ventilation		583	mm	Width of the front		595	mm
MIN Height of the base cabinet niche, including all required space for installation or ventilation		600	mm	Depth of the front		20	mm
MAX Height of the wall cabinet niche, including all required space for installation or ventilation		0	mm	Maximum depth all protruding elements, e.g. handles, controls		39	mm
MAX Height of the tall cabinet niche, including all required space for installation or ventilation		585	mm	Lateral clearance between front edge and most protruding elements which avoid to open a neighbour front more than 90 degrees		38	mm
MAX Height of the base cabinet niche, including all required space for installation or ventilation		601	mm	Projection of front in relation to housing of appliance		20	mm
MIN Width of the wall cabinet niche, including all required space for installation or ventilation		0	mm	Projection of front in relation to bearing area of the appliance. Taken at minimum height of appliance, if height is adjustable		5	mm
MIN Width of the tall cabinet niche, including all required space for installation or ventilation		560	mm	When product panel is missing, set to 0		97	mm
MIN Width of the base cabinet niche, including all required space for installation or ventilation		560	mm	Space in front, which is required to guarantee full operability. The most protruding part gives this dimension		460	mm
MAX Width of the wall cabinet niche, including all required space for installation or ventilation		0	mm	Height from bearing area of appliances and lower handle		438	mm
MAX Width of the tall cabinet niche, including all required space for installation or ventilation		568	mm	Frontal handle thickness		21	mm
MAX Width of the base cabinet niche, including all required space for installation or ventilation		568	mm	Frontal handle width		519	mm
MIN Depth of the wall cabinet niche, including all required space for installation or ventilation		0	mm	MIN Height of the product body		570	mm
MIN Depth of the tall cabinet niche, including all required space for installation or ventilation		560	mm	MAX Height of the product body		570	mm
MIN Depth of the base cabinet niche, including all required space for installation or ventilation		560	mm	Width of the product body		558	mm
Space in front, which is required to install bottom trim		9	mm	Depth of the product body		548	mm
Indicates whether a ventilation opening is needed or not. Default is "N"		Yes		Full depth of product excluding protruding interface elements		570	mm
WALL CABINET (vent-shaft incoming)				Appliance can be used as base for other appliances from the same manufacturer. Default is "No"			
Indicates the position of the freespace for the inbound airflow (wall cabinet)		Rear		Appliance Flap door			
Minimum space or inbound ventilation (wall cabinet)		0	mm	Projection of the opened flap in relation to bearing area		0	mm
Minimum area for inbound ventilation cavity (wall cabinet)		0	cm²	Maximum angle when flap door is opened totally		89	mm
WALL CABINET (vent-shaft outgoing)				Appliance Side swing door			
Indicates the position of the freespace for the outbound airflow (wall cabinet)		Rear		Lateral projection of front incl. controls when door is opened totally. At the side where the hinge is mounted		0	mm
Minimum space or outbound ventilation (wall cabinet)		0	mm	Lateral projection of opened front at the side where the hinge is fixed		0	mm
Minimum area for outbound ventilation cavity (wall cabinet)		0	cm²	Maximum angle when door is opened totally		0	mm
TALL CABINET (vent-shaft incoming)				Appliance other			
Indicates the position of the freespace for the inbound airflow (tall cabinet)		Rear		Depth from front end of the niche to the front end of the freespace of the retrace		428	mm
Minimum space for inbound ventilation (tall cabinet)		40	mm	Height from niche to bottom end of freespace for the retrace		525	mm
Minimum area for inbound ventilation cavity (tall cabinet)		150	cm²				
TALL CABINET (vent-shaft outgoing)							
Indicates the position of the freespace for the outbound airflow (tall cabinet)		Rear					
Minimum space for outbound ventilation (tall cabinet)		0	mm				
Minimum area for outbound ventilation cavity (tall cabinet)		150	cm²				
BASE CABINET (vent-shaft incoming)							
Indicates the position of the freespace for the inbound airflow (base cabinet)		Rear					
Minimum space for inbound ventilation (base cabinet)		40	mm				
Minimum area for inbound ventilation cavity (base cabinet)		150	cm²				
BASE CABINET (vent-shaft outgoing)							
Indicates the position of the freespace for the outbound airflow (base cabinet)		Rear					
Minimum space for outbound ventilation (base cabinet)		0	mm				
Minimum area for outbound ventilation cavity (base cabinet)		150	cm²				